



EXPORT DESIGNS 2024

midas
MILEAGE



Grow with MIDAS MILEAGE...

Get the sales and profit growth you want in your retreading business by giving your customers MIDAS MILEAGE. Our high mileage compounds are designed to lower a fleet owners running cost by maximizing mileage per retread tyre.



Founded in 1969, MIDAS has grown to become Asia's largest supplier of Tyre Retreading Materials. We have focused on constantly improving compounds to provide customers with the best mileage.



ISO 9001:2015, ISO 14001:2015

Our quality system is certified by VEXIL and RAPL, to ensure that we provide you with consistent materials, on time, every time.




RANGE OF PRODUCTS



Precured Treads

Made from high mileage compounds, our treads have been accepted the world over and tested on all road conditions.

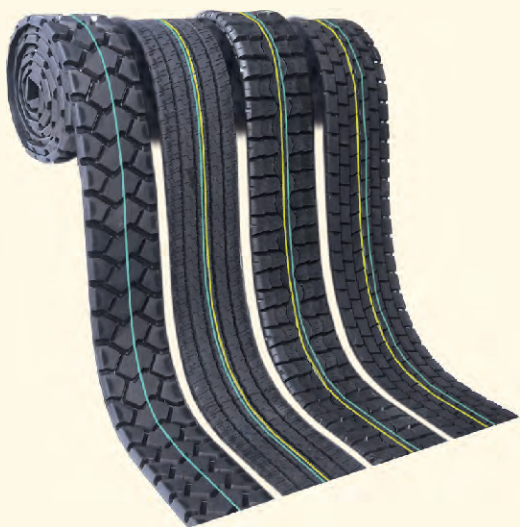

Round Tread

Continuous treads for use with a suitable builder. Please contact us for details.



Bonding Gum

Our gum is made from 100% natural rubber to increase tack. Available in customer specified sizes also. Different types of Gum are available for both Precured and Hot process. Can be used to fill nail holes and repair injured parts of casing.



Black Vulcanizing Solution

Available as **THICK** and **RTU** solution. Compatible with both precured and hot process.



RANGE OF PRODUCTS

midas

White/non Marking Tread

Our white/non marking tread has become accepted all over the world and especially in Europe. Available in the design of your choice.



Conventional (Hot) Rubber

Increased scorch safety to maximise shelf life. Different compounds available for different uses including (Truck, Tractor and OTR). Available in customer specified sizes.



Rope Rubber

To be used in rubber extruder guns to repair rasping area. Provides excellent process safety and tack.



Orbi Strip

Available for Truck, OTR and car applications.



RANGE OF PRODUCTS

Curing Envelopes

Heat resistant envelopes
for ease of use and long life.



Curing Bags




Flaps



OTR Tyres 'O' Ring

Sealing the
tubeless tyre beads of
OTR vehicle with split rims


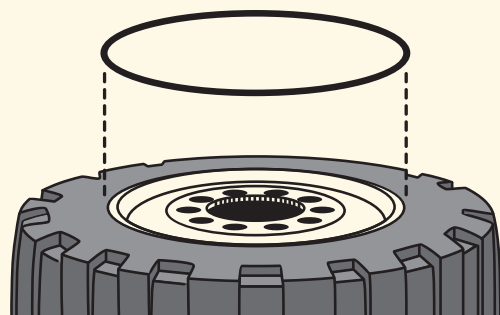


Wicking Pad

For Double Envelope System




TRACTION

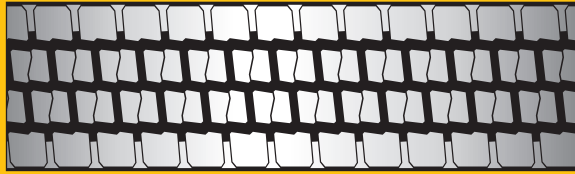

midas
MILEAGE

ADH


 mm	 mm	 m	 kg/m
230	14.0	3.73	3.70
220	14.0	3.28	3.60
215	14.0	3.28	3.41
210	13.5	3.73	3.39
190	14.5	3.23	3.19
190	14.5	3.15	3.21
190	14.5	3.00	3.20
180	16.0	3.07	3.39
180	12.0	3.00	2.67
180	12.0	2.62	2.63
170	14.5	2.64	3.11

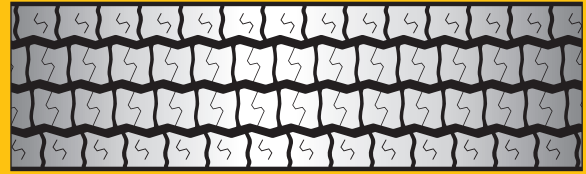

midas
MILEAGE

BDE

 mm	 mm	 m	 kg/m
230	17.5	10.50	5.19
220	17.5	10.50	4.70

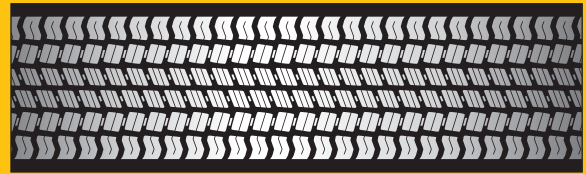


midas
MILEAGE

M+S

GRTA

 mm	 mm	 m	 kg/m
250	17.0	10.50	4.70
240	17.0	10.50	4.68
230	17.0	3.73	4.53

WITH WINGS

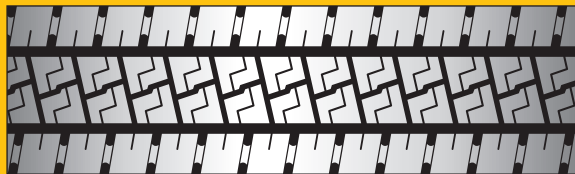

midas
MILEAGE

ALD

 mm	 mm	 m	 kg/m
240	13.0	3.73	3.91
230	16.0	3.25	4.46
230	13.5	3.73	3.89
220	16.0	3.73	4.32
220	13.5	3.73	3.59
215	13.5	3.73	3.51
210	13.0	3.73	3.38
210	11.5	2.51	2.95
205	13.0	3.25	3.26
200	12.5	3.15	2.98
190	12.0	3.00	2.77
187	15.0	3.07	3.36
187	15.0	3.00	3.37
175	12.0	3.00	2.57
175	12.0	2.62	2.56
165	13.0	2.51	2.59




midas
MILEAGE

M+S

M-1

 mm	 mm	 m	 kg/m
280	19.0	3.70	5.46
270	19.0	3.55	5.45
260	19.0	10.50	5.05
250	19.0	10.50	4.91
240	19.0	10.50	4.77
230	19.0	10.50	4.42

TRACTION

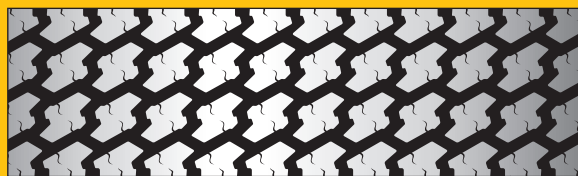

midas
MILEAGE

M+S

M-4

 mm	 mm	 m	 kg/m
260	18.0	10.50	4.93
250	18.0	10.50	4.58
240	18.0	10.50	4.55
230	18.0	10.50	4.42




midas
MILEAGE

M+S

M-8

 mm	 mm	 m	 kg/m
260	19.0	10.50	4.73
250	19.0	10.50	4.60
240	19.0	10.50	4.48
190	15.0	10.50	2.76
180	14.0	10.50	2.50
170	13.0	10.50	2.25
160	14.0	3.38	2.16
150	14.5	2.61	2.09
140	13.0	3.38	1.76

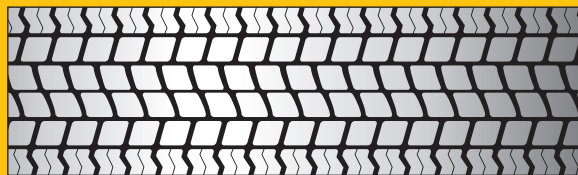

midas
MILEAGE

M+S

M-12

 mm	 mm	 m	 kg/m
270	17.0	3.73	5.71
260	17.0	3.73	5.31



midas
MILEAGE

M+S

M-10

 mm	 mm	 m	 kg/m
280	21.0	3.40	6.38
270	21.0	3.60	6.11
280	20.0	3.30	6.28
270	20.0	3.40	5.82
260	20.0	10.50	5.70
250	20.0	10.50	5.46
240	20.0	10.50	5.21
230	20.0	3.70	4.95
230	19.0	10.50	4.61
220	20.0	3.70	4.78
220	15.0	3.30	3.52
210	15.0	3.30	3.36



midas
MILEAGE

M+S

M-22

 mm	 mm	 m	 kg/m
230	16.5	10.50	4.09
220	16.5	10.50	3.87
215	16.5	10.50	3.81
204	16.5	10.50	3.61

TRACTION




MIDAS
MILEAGE

M+S

M-26

 mm	 mm	 m	 kg/m
285	18.0	3.30	5.85
275	18.0	10.50	5.40
265	18.0	10.50	5.20
260	18.0	10.50	5.14
250	18.0	10.50	4.90
240	18.0	10.50	4.78
230	18.0	10.50	4.57
220	14.5	3.25	3.40
220	13.5	3.25	3.38
195	14.0	3.15	3.17

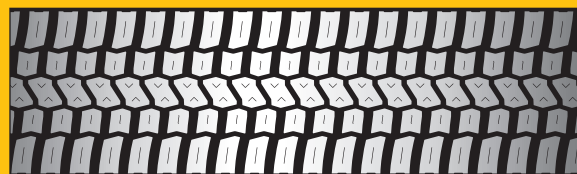

MIDAS
MILEAGE

M+S

MTRK

 mm	 mm	 m	 kg/m
285	20.0	3.73	6.00
270	20.0	3.73	5.58
260	20.0	3.73	5.30
250	20.0	3.73	5.17



MIDAS
MILEAGE

M+S

M-29

 mm	 mm	 m	 kg/m
270	18.0	10.50	5.62
260	18.0	10.50	5.28
250	18.0	10.50	5.05




MIDAS
MILEAGE

M+S

RM-16

 mm	 mm	 m	 kg/m
240	18.0	3.38	4.82
240	18.0	3.28	4.82

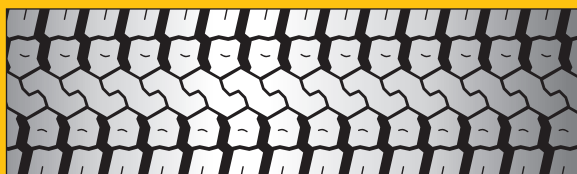

MIDAS
MILEAGE

M+S

PSD

 mm	 mm	 m	 kg/m
240	20.0	3.73	5.44
230	20.0	3.73	5.17
220	20.0	3.73	5.12




MIDAS
MILEAGE

M+S

RM-31

 mm	 mm	 m	 kg/m
270	20.0	3.30	5.80
260	20.0	3.30	5.73
250	20.0	3.43	5.60
240	20.0	3.38	5.47
220	20.0	3.30	5.00
250	16.0	3.43	4.69
240	16.0	3.38	4.53

TRACTION

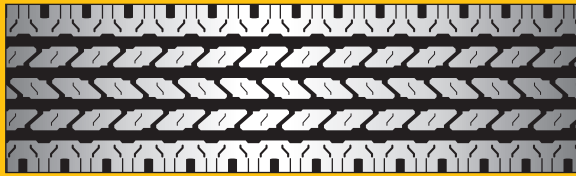

MIDAS
MILEAGE

RM-17

 mm	 mm	 m	 kg/m
240	16.0	3.38	4.53
240	16.0	3.28	4.51





MIDAS
MILEAGE

M+S

ZZ

 mm	 mm	 m	 kg/m
250	18.0	10.50	4.64
240	18.0	10.50	4.36
230	18.0	10.50	4.11
220	19.0	3.38	3.89

BUS & LIGHT TRUCK

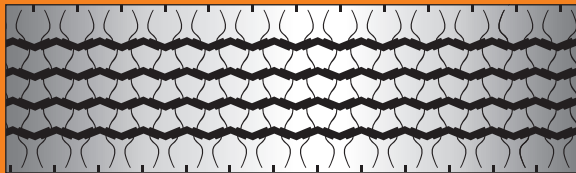

MIDAS
MILEAGE

BCRDL

 mm	 mm	 m	 kg/m
230	15.0	3.73	4.29
215	15.0	3.35	4.03
212	10.0	3.25	2.80
190	11.0	3.15	2.79



MIDAS
MILEAGE

M+S

D-167-P

 mm	 mm	 m	 kg/m
230	17.0	3.30	3.91



MIDAS
MILEAGE

M+S

D-167-E

 mm	 mm	 m	 kg/m
219	15.0	3.25	3.57
203	15.0	3.25	3.02




MIDAS
MILEAGE

H-27

 mm	 mm	 m	 kg/m
203	13.5	3.40	3.32
194	13.5	3.30	3.27
175	12.0	2.62	2.56
160	12.0	2.51	2.31


BUS & LIGHT TRUCK

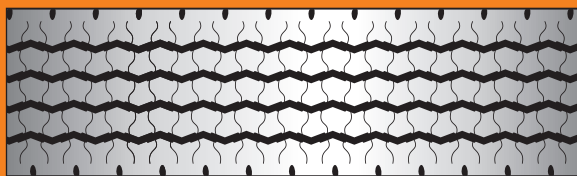

MIDAS
MILEAGE

M-9

 mm	 mm	 m	 kg/m
270	13.0	3.28	4.42
260	13.0	3.28	4.26
250	13.0	3.28	4.09
240	13.0	3.28	4.02
230	13.0	3.73	3.51
220	13.0	3.73	3.40
215	13.0	3.73	3.27

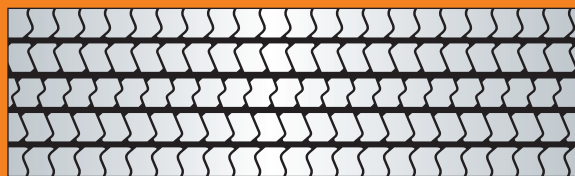

MIDAS
MILEAGE

M-23

 mm	 mm	 m	 kg/m
220	13.0	3.25	3.54
220	9.5	10.50	2.79
210	9.5	10.50	2.62




MIDAS
MILEAGE

M+S

M-14


 mm	 mm	 m	 kg/m
210	13.0	10.50	2.98
200	13.0	10.50	2.65
190	13.0	10.50	2.91
180	13.0	10.50	2.41
170	13.0	10.50	2.43

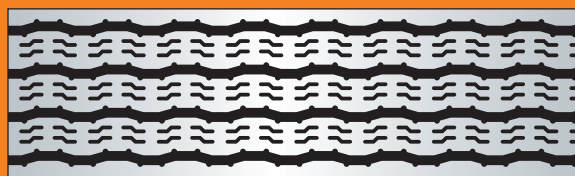

MIDAS
MILEAGE

M-24

 mm	 mm	 m	 kg/m
230	13.0	3.73	3.49
220	13.0	3.28	3.41
220	12.0	10.50	3.11
215	13.0	3.25	3.38
215	12.0	10.50	2.98
203	12.0	10.50	2.77

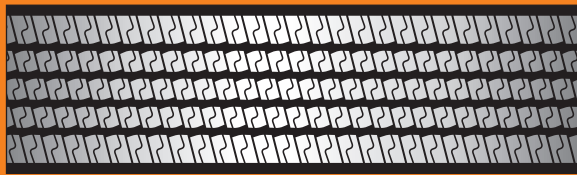


MIDAS
MILEAGE

M-15

 mm	 mm	 m	 kg/m
260	16.0	10.50	5.21
250	16.0	10.50	4.99

WITH WINGS

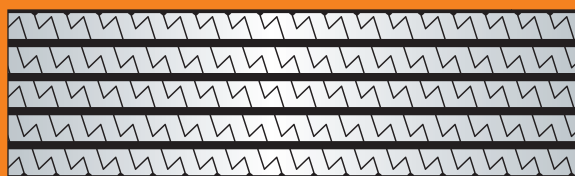


MIDAS
MILEAGE

M-27

 mm	 mm	 m	 kg/m
240	12.5	3.25	3.97
230	12.5	3.25	3.60
225	13.5	3.73	3.94
220	13.5	3.25	3.72
215	13.5	3.73	3.65
175	11.5	2.62	2.60
160	11.5	2.51	2.31

BUS & LIGHT TRUCK

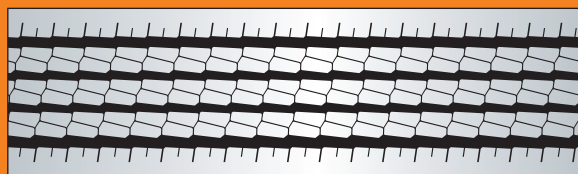

MIDAS
MILEAGE

M-28

 mm	 mm	 m	 kg/m
230	13.0	3.73	3.67
220	13.0	3.73	3.11



MIDAS
MILEAGE

M-31


 mm	 mm	 m	 kg/m
240	13.0	3.38	3.93
240	12.0	3.25	3.69
225	13.0	3.73	3.67
215	13.0	3.25	3.45
185	12.0	3.00	2.77
175	11.5	3.00	2.50
175	11.5	2.62	2.52



MIDAS
MILEAGE

MARG


 mm	 mm	 m	 kg/m
250	11.0	3.30	3.48
240	11.0	3.30	3.36
230	11.0	3.30	3.27
220	11.5	3.30	3.15

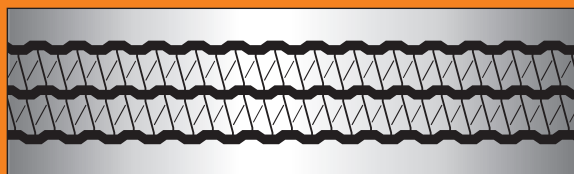

MIDAS
MILEAGE

MCH


 mm	 mm	 m	 kg/m
250	15.0	3.60	4.94
240	15.0	3.60	4.64
230	15.0	3.60	4.47

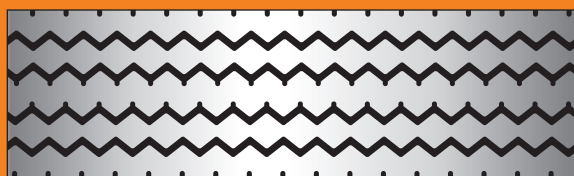

MIDAS
MILEAGE

MHW

 mm	 mm	 m	 kg/m
158	11.5	10.50	2.18
148	11.5	10.50	2.10
138	11.5	10.50	2.00

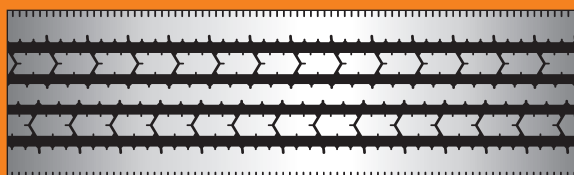


MIDAS
MILEAGE

MREC

 mm	 mm	 m	 kg/m
280	14.0	3.30	4.51
270	14.5	3.73	4.59
265	14.5	3.73	4.58
260	14.5	3.73	4.44
250	14.5	3.73	4.21
240	14.5	3.73	4.02
230	14.5	3.73	3.83
220	14.5	3.73	3.70
208	13.5	3.25	3.32


BUS & LIGHT TRUCK

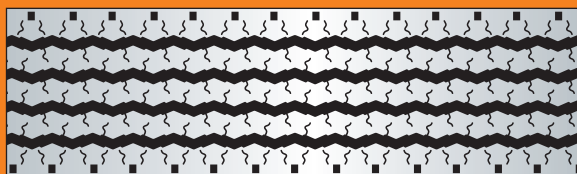

MIDAS
MILEAGE

R-2

 mm	 mm	 m	 kg/m
255	15.0	3.73	4.88
250	17.0	3.28	5.09
250	15.0	10.50	4.73
245	15.0	10.50	4.41
240	15.0	10.50	4.15
235	14.0	3.73	4.00
230	14.0	10.50	4.11
225	15.0	3.73	3.94
220	17.0	3.28	4.33
220	15.0	10.50	4.07
215	14.5	3.73	3.65
210	15.0	10.50	3.70
200	15.0	3.30	3.52
195	15.0	3.28	3.38
195	15.0	3.15	3.40
190	15.0	3.20	3.19
185	13.5	3.30	3.09
175	12.0	3.30	2.57
160	13.0	3.40	2.38
158	11.5	2.51	2.23
148	11.5	2.51	2.07
148	11.0	2.57	1.83

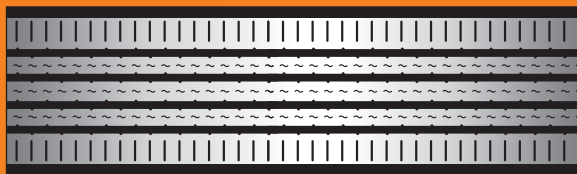

MIDAS
MILEAGE

NZA-2A

 mm	 mm	 m	 kg/m
230	12.0	10.50	3.46
220	12.0	7.50	3.35
210	12.0	7.40	3.21

WITH WINGS




MIDAS
MILEAGE

M+S

RM-1

 mm	 mm	 m	 kg/m
175	14.5	3.00	3.00
160	13.0	2.51	2.55
150	13.0	2.51	2.23
140	11.5	2.36	1.91


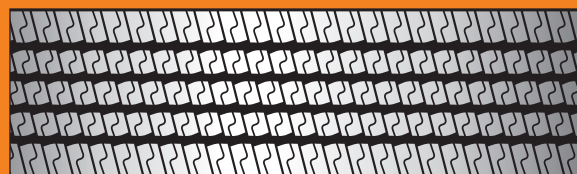


MIDAS
MILEAGE

RM-30

 mm	 mm	 m	 kg/m
265	16.5	3.30	5.11
260	15.0	3.45	4.70
250	16.5	3.43	4.85
240	16.5	3.38	4.60
230	17.0	3.65	4.65
220	16.5	3.30	4.27
250	14.0	3.30	4.15
240	14.0	3.38	4.00
215	13.5	3.25	3.51
210	13.5	3.25	3.50
190	12.5	3.00	2.90
180	12.5	3.00	2.73
175	12.5	3.00	2.51
160	12.0	2.51	2.31


TRAILER

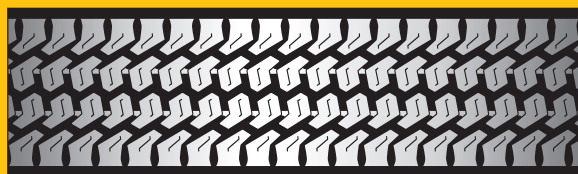

midas
MILEAGE

M-5 (B)


 mm	 mm	 m	 kg/m	WITH WINGS
320	14.5	4.00	5.46	
295	15.0	3.60	5.64	

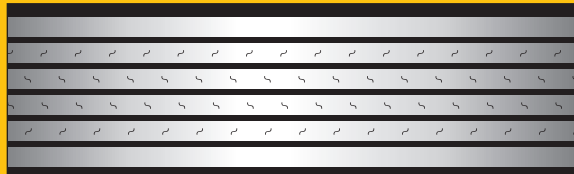

midas
MILEAGE

M-7

 mm	 mm	 m	 kg/m	WITH WINGS
295	13.0	3.40	4.85	

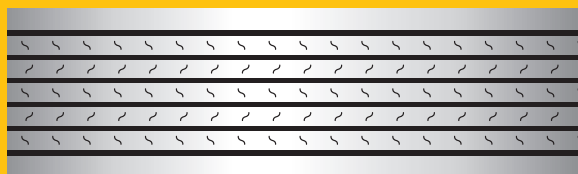

midas
MILEAGE

M-7


 mm	 mm	 m	 kg/m	
390	13.0	3.40	6.43	
370	13.0	4.20	5.97	
360	13.0	3.60	6.08	
350	13.0	3.60	5.53	



midas
MILEAGE

M-18

 mm	 mm	 m	 kg/m	WITH WINGS
310	15.0	3.30	5.86	
295	15.0	3.40	5.62	
287	15.0	3.40	5.50	

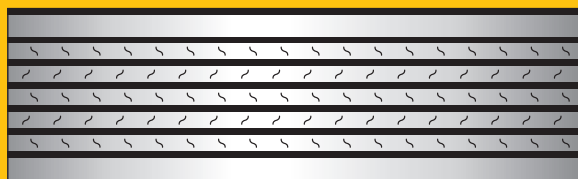

midas
MILEAGE

M-7

 mm	 mm	 m	 kg/m	WITH WINGS
335	13.0	3.40	5.53	
320	20.0	3.73	7.16	
320	13.0	3.73	5.18	




midas
MILEAGE

M-18 NEW

 mm	 mm	 m	 kg/m	WITH WINGS
287	15.0	3.73	5.66	
				
CROSS SECTION				


TRAILER

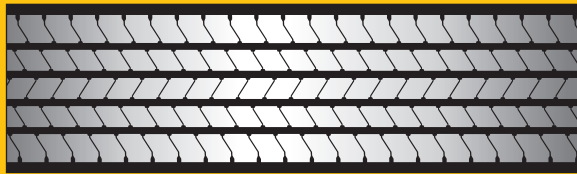

midas
MILEAGE

MNS


 mm	 mm	 m	 kg/m	WITH WINGS
320	13.5	3.30	5.46	
295	13.5	3.60	4.97	
287	13.5	3.73	4.91	

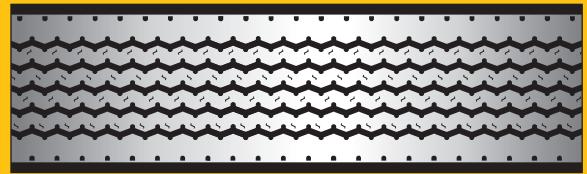

midas
MILEAGE

PLND

 mm	 mm	 m	 kg/m	WITH WINGS
305	13.0	3.73	4.70	
295	13.0	10.50	4.38	
285	13.0	10.50	4.43	

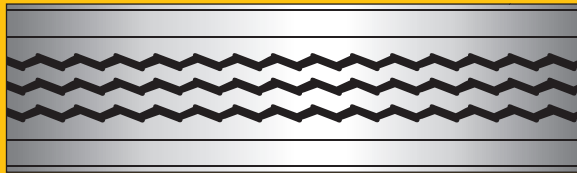

midas
MILEAGE

WINGS TREAD

 mm	 mm	 m	 kg/m
340	11.0	10.00	4.40

MIXED APPLICATION



midas
MILEAGE

M+S

GRTDL

 mm	 mm	 m	 kg/m
240	17.0	10.50	4.14
230	17.0	10.50	4.01
220	17.0	10.50	3.81




midas
MILEAGE

M-6

 mm	 mm	 m	 kg/m
230	15.0	3.73	3.97
215	15.0	3.73	3.65


MIXED APPLICATION

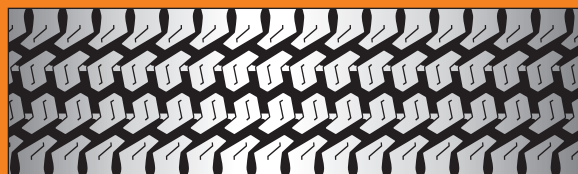

midas
MILEAGE

M-5

 mm	 mm	 m	 kg/m
320	15.0	3.73	5.72
305	15.0	10.50	5.41
295	15.0	10.50	5.57
250	14.5	3.73	4.03
240	14.5	3.73	3.78
230	14.5	3.73	3.62
220	16.5	10.50	4.05
220	14.0	3.73	3.40
215	16.5	10.50	3.76
215	14.0	3.73	3.35

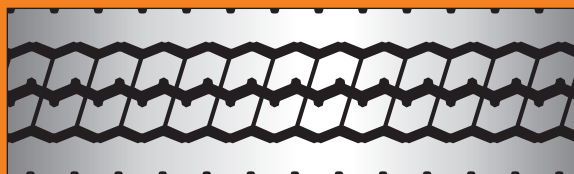

midas
MILEAGE

M-30

 mm	 mm	 m	 kg/m
240	14.0	3.38	4.17
240	13.0	3.73	3.91
230	14.0	3.73	3.83
225	13.0	3.73	3.73
220	14.0	3.30	3.79
220	13.0	3.73	3.62
215	13.0	3.73	3.46



midas
MILEAGE

M+S

M-16

 mm	 mm	 m	 kg/m
270	22.0	10.50	6.52
260	21.0	10.50	6.08
250	21.0	10.50	5.67
240	21.0	10.50	5.49
230	20.0	3.38	4.94
260	18.0	10.50	5.38
250	18.0	10.50	4.93
240	18.0	10.50	4.74
260	14.0	3.73	4.34
240	14.0	3.73	3.86
230	14.0	3.73	3.64
220	14.0	3.73	3.44




midas
MILEAGE

M+S

M-32

 mm	 mm	 m	 kg/m
260	18.0	10.50	5.46
250	18.0	10.50	5.27
240	18.0	10.50	4.99
230	18.0	4.20	4.66

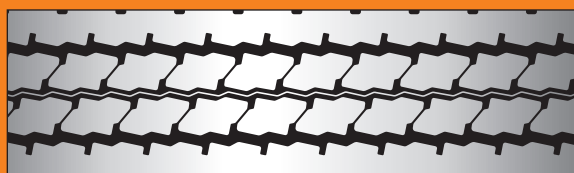

midas
MILEAGE

M-33

 mm	 mm	 m	 kg/m
230	17.0	3.73	4.77
220	17.0	3.73	4.50

MIXED APPLICATION



midas
MILEAGE

MAXIMUS (H)


 mm	 mm	 m	 kg/m
265	16.0	10.50	4.99
250	16.0	10.50	4.66
240	16.0	10.50	4.50
235	19.0	10.50	4.92
235	15.0	3.73	4.05
230	16.0	10.50	4.19
225	16.0	3.73	4.16
220	16.0	10.50	4.03
210	16.5	3.25	3.64
190	16.0	3.40	3.53



midas
MILEAGE

MAXIMUS (L)

 mm	 mm	 m	 kg/m
260	14.0	3.73	4.40
250	14.0	7.50	4.06
240	14.0	7.50	3.92
235	14.0	10.50	3.79
230	14.0	10.50	3.78
225	14.0	7.50	3.48
220	14.0	7.50	3.57
215	15.0	10.50	3.63
215	14.0	7.50	3.30
210	15.0	10.50	3.64
205	13.5	3.73	3.18
194	13.5	3.30	3.03
187	13.5	3.30	3.03
180	14.0	3.73	2.90
160	11.0	2.51	2.31
150	11.0	2.51	2.07

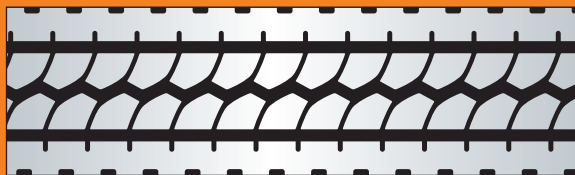

midas
MILEAGE

M-34

 mm	 mm	 m	 kg/m
240	14.0	3.73	4.13
230	13.5	3.73	3.60
225	14.0	3.73	3.81
215	14.0	3.73	3.70



midas
MILEAGE

M+S

MHAM

 mm	 mm	 m	 kg/m
270	21.0	3.73	6.18
260	21.0	10.50	6.10
250	21.0	10.50	5.94
240	21.0	10.50	5.68
260	18.0	10.50	5.54
250	18.0	10.50	5.30
240	18.0	10.50	5.06

MIXED APPLICATION



MIDAS
MILEAGE

M+S

MML

 mm	 mm	 m	 kg/m
270	21.0	3.60	6.25
260	21.0	10.50	5.98
250	21.0	10.50	5.57
240	21.0	10.50	5.35
230	21.0	10.50	5.31
270	18.0	10.50	5.46
260	18.0	10.50	5.29
250	18.0	10.50	5.02
240	18.0	10.50	4.91
230	18.0	10.50	4.57
220	17.0	10.50	4.28
260	14.0	3.40	4.33
250	14.0	3.73	3.94
240	14.0	3.73	3.80
230	14.0	3.73	3.65
215	14.0	3.73	3.40
210	14.0	3.73	3.38
100	8.5	1.52	0.92



MIDAS
MILEAGE

M+S

RM-13

 mm	 mm	 m	 kg/m
240	18.0	3.38	4.73
230	18.0	3.38	4.50
220	18.0	3.38	4.32
210	18.0	3.38	3.70



MIDAS
MILEAGE

TRACK MASTER

 mm	 mm	 m	 kg/m
240	18.0	3.73	4.96
230	18.0	3.73	4.61
225	18.0	3.73	4.48
220	15.0	3.73	4.05
215	16.0	3.30	3.88
215	14.0	3.25	3.60
210	15.5	3.30	3.76
210	13.5	3.23	3.31
205	14.0	3.35	3.55
205	12.5	3.23	3.07
200	15.0	3.30	3.48
195	14.0	3.30	3.36
195	12.0	3.15	2.83
195	12.0	2.82	2.84
187	15.0	3.15	3.33
187	13.5	3.15	2.73
187	12.0	3.15	2.67
187	12.0	2.82	2.70
170	13.0	3.00	2.52
158	12.2	2.51	2.43
150	12.5	2.51	2.43
150	11.5	2.51	2.17
145	11.0	2.36	2.01



MIDAS
MILEAGE

M+S

MVI

 mm	 mm	 m	 kg/m
250	18.0	10.50	4.89
240	18.0	3.40	4.15
210	13.5	3.25	3.14

MIXED APPLICATION



midax
MILEAGE

XZYP

 mm	 mm	 m	 kg/m
219	14.0	3.73	3.62
203	14.0	3.55	3.24
194	14.0	3.28	3.09



midax
MILEAGE

M+S

Z-LUG

 mm	 mm	 m	 kg/m
240	21.0	10.50	5.31
240	19.0	10.50	4.90
232	22.0	10.50	5.11
230	19.0	10.50	4.79
220	19.0	10.50	4.34
250	14.5	3.73	4.09
240	16.0	3.73	4.28
235	14.0	3.73	3.43
230	14.0	3.73	3.40
225	16.0	3.73	4.10
220	16.0	3.73	3.94
220	15.5	3.25	3.63
215	16.0	3.73	3.51
210	16.0	3.73	3.73
205	14.0	3.73	3.31
195	15.0	3.15	3.44
195	14.0	3.15	3.11
190	15.0	3.15	3.30
177	13.0	3.00	2.77
160	13.0	2.51	2.39
124	12.0	2.29	1.75



midax
MILEAGE

M+S

ZL-2

 mm	 mm	 m	 kg/m
230	21.0	3.73	4.69
220	21.0	10.50	4.68
210	21.0	10.50	4.37
200	21.0	10.50	4.17

OFF ROAD



midax
MILEAGE

LOG LUGGER

 mm	 mm	 m	 kg/m
240	21.0	3.73	5.44
220	17.0	3.73	4.18
210	15.0	3.40	3.48



midax
MILEAGE

M+S

M-3

 mm	 mm	 m	 kg/m
240	19.0	10.50	5.01

OFF ROAD



MIDAS
MILEAGE

M+S

GPZH

 mm	 mm	 m	 kg/m
270	32.0	10.50	8.10
270	20.0	3.73	5.80
260	19.0	10.50	5.43
250	22.0	10.50	6.06
250	19.0	3.73	5.42
240	24.0	3.70	6.16
240	21.0	3.38	5.18
240	19.0	10.50	4.90
232	22.0	10.50	5.42
230	21.0	3.38	4.85
230	20.0	10.50	4.66
230	20.0	3.73	4.90
225	20.0	3.73	4.83
215	19.0	3.30	4.24
210*	15.5	3.25	3.54



MIDAS
MILEAGE

ID MINES

 mm	 mm	 m	 kg/m
230	19.0	4.00	4.77
225	18.0	4.00	4.33
205	16.0	3.23	3.72
150	12.0	2.51	2.07



MIDAS
MILEAGE

MOR-1

 mm	 mm	 m	 kg/m
315	25.0	3.50	8.14
 CROSS SECTION			



MIDAS
MILEAGE

MOR-2

 mm	 mm	 m	 kg/m
260	24.0	3.30	6.56
250	24.0	3.30	6.43
240	24.0	3.30	6.18
230	24.0	3.30	5.91

*Coming soon

SPECIAL APPLICATION



MIDAS
MILEAGE

DB TREAD

 mm	 mm	 m	 kg/m
500	12.5	4.00	7.55
305	12.6	10.50	4.77
295	19.0	3.25	6.36
240	23.0	3.40	6.10
230	16.0	3.10	4.45
220	19.0	3.40	4.71
205	22.0	3.28	5.12
205	20.0	3.30	4.85
200	14.0	2.55	3.27
190	19.0	3.23	4.02
175	16.0	3.20	3.31
140	14.0	2.40	2.25



MIDAS
MILEAGE

HFD


 mm	 mm	 m	 kg/m
520	45.0	0.45	15.56
445	40.0	1.18	11.44



MIDAS
MILEAGE

MNRT

 mm	 mm	 m	 kg/m
390	16.0	3.40	6.43
375	16.0	3.40	6.31
320	16.0	3.40	5.29
290	16.0	3.40	4.79

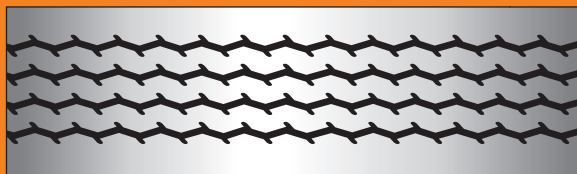

MIDAS
MILEAGE

GARTIC

 mm	 mm	 m	 kg/m
330	15.5	3.70	6.84
295	15.5	3.90	5.95



MIDAS
MILEAGE

GRML

 mm	 mm	 m	 kg/m
320	20.0	4.00	6.22
300	18.0	4.00	5.47
290	18.0	3.75	5.31



MIDAS
MILEAGE

M PORT-1

 mm	 mm	 m	 kg/m
438	45.0	4.85	18.87

SPECIAL APPLICATION




midas

MILEAGE

MET

 mm	 mm	 m	 kg/m
359	24.0	3.60	8.53

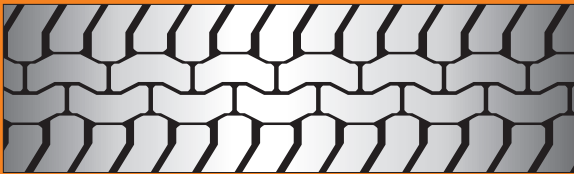

midas

MILEAGE

PRT

 mm	 mm	 m	 kg/m
300	11.0	3.73	3.70



midas

MILEAGE

SPT 9

 mm	 mm	 m	 kg/m
350	23.0	3.26	6.90





midas

MILEAGE

XHA

 mm	 mm	 m	 kg/m
520	38.0	1.18	17.00
470	36.0	1.09	14.58

WINTER

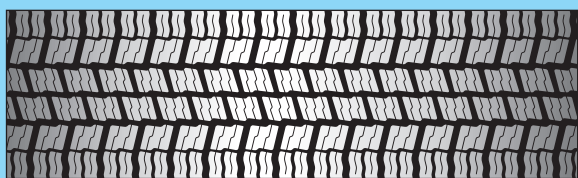


MIDAS
MILEAGE

M+S

DNM

 mm	 mm	 m	 kg/m
275	20.0	3.10	5.97
260	21.0	3.73	5.71
250	21.0	3.30	5.69
240	21.0	3.70	5.30

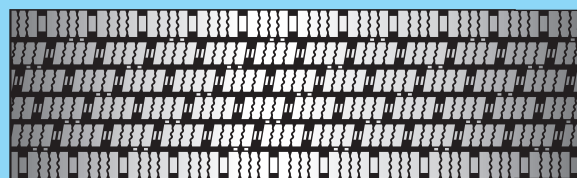

MIDAS
MILEAGE

M+S

M-17

 mm	 mm	 m	 kg/m
250	22.0	3.40	6.01
240	22.0	3.40	5.76




MIDAS
MILEAGE

M+S

M-20

 mm	 mm	 m	 kg/m
330	23.0	3.73	7.58
300	23.0	3.30	6.97
280	20.0	3.73	5.82
270	20.0	3.50	5.39
260	20.0	3.73	5.29
250	20.0	3.50	5.27
240	20.0	3.73	4.88
230	20.0	3.70	4.66

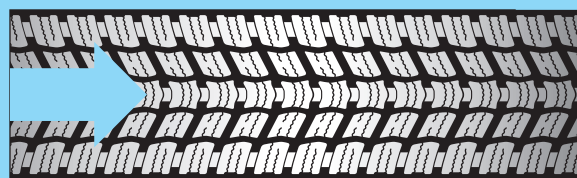


MIDAS
MILEAGE

M+S

MDR

 mm	 mm	 m	 kg/m
270	20.5	3.90	5.74
260	20.5	3.80	5.55

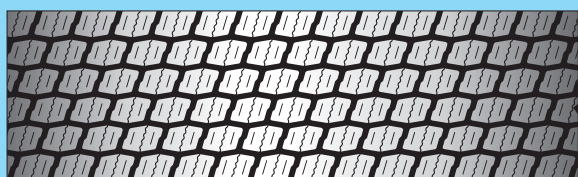


MIDAS
MILEAGE

M+S

MRS

 mm	 mm	 m	 kg/m
270	21.0	3.30	6.27

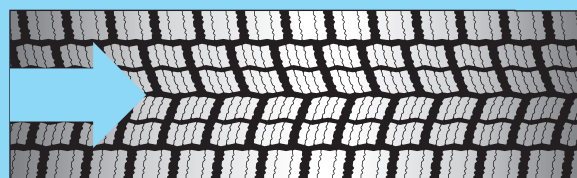


MIDAS
MILEAGE

M+S

MW 31

 mm	 mm	 m	 kg/m
270	20.0	3.73	5.40
260	20.0	3.30	5.17
250	20.0	3.65	5.02


WINTER

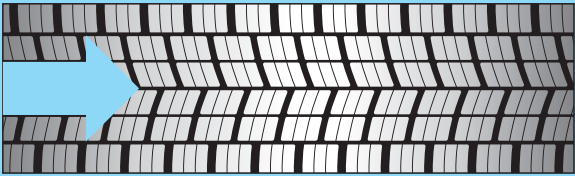

midax
MILEAGE

M+S **MRS 2**

 mm	 mm	 m	 kg/m
275	20.0	3.10	6.29
260*	20.0	3.30	5.91

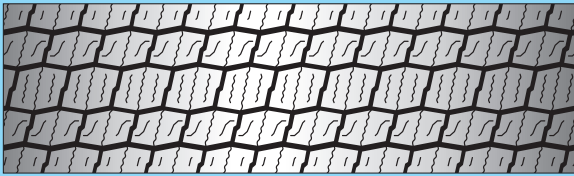


midax
MILEAGE

M+S **M WAY**

 mm	 mm	 m	 kg/m
260	21.0	3.73	6.39

M-34 CURVED

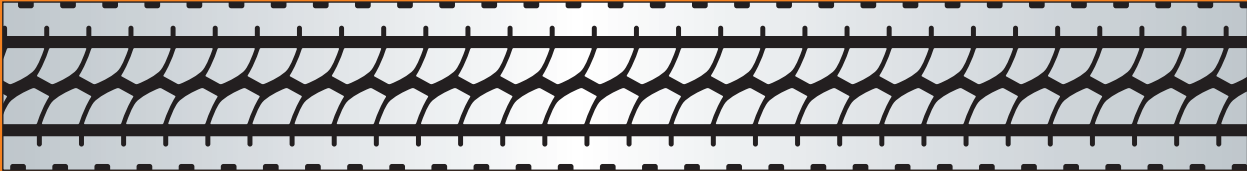

midax
MILEAGE

 mm	 mm	 m	 kg/m
255	14.5	3.32	4.64
240	14.0	3.78	4.23
230	13.5	3.78	3.74
220	14.0	3.78	3.81



CROSS SECTION

*Coming soon




SNOW GRIP TEST FOR C3 TIRES



The below tires using Midas retreads were tested against a SRTT Michelin tire to determine Snow Index values. They have exceeded the required value. The tire have passed the snow performance test successfully.

M-5



M-10



List of retreadable sizes

1.	295	60	R	22.5
2.	295	80	R	22.5
3.	315	60	R	22.5
4.	315	70	R	22.5
5.	315	80	R	22.5
6.	12		R	22.5
7.	13		R	22.5

M-16



M-20



M-26



M-29



MDR




MHAM



MML-2



MW-31



ARC / SNAP SEAL / FLEX SEAL SYSTEM



Outer Envelope

Outer Envelope skirt length extends **2.0 inches** below the tyre bead on each side.

Sl. No.	Product Code	Tyre Size (Suggested)
1	46 x 15	325/95 R 24, 12.00 R 24
2	44 x 16	12 R 24.5, 11 R 24.5, 315/80 R 22.5, 10.00 R 22
3	44 x 14	11.00 R 24, 13 R 22.5, 11.00 R 22, 14/80 R 20, 11.00 R 20
4	44 x 13	12.00 R 22, 12.00 R 20
5	43 x 14	385/65 R 22.5, 365/80 R 20
6	42 x 14	315/75 R 22.5, 295/80 R 22.5, 295/75 R 22.5, 12 R 22.5, 10.00 R 20
7	42 x 15	315/70 R 22.5, 305/75 R 22.5, 305/70 R 22.5, 275/80 R 22.5, 11 R 22.5
8	40 x 13	275/70 R 22.5, 265/70 R 22.5, 10 R 22.5, 9.00 R 20, 305/70 R 19.5
9	35 x 12 RC	7.50 R 20, 285/70 R 19.5, 265/70 R 19.5, 9.00 R 16, 8.25 R 16, 8.25 R 15
10	35 x 12 ST	7.00 R 20, 6.50 R 20, 245/70 R 19.5
11	32 x 11	245/65 R 19.5, 235/70 R 19.5, 245/70 R 17.5, 235/75 R 17.5, 9.5 R 17.5, 10 R 16.5, 265/75 R 16, 245/75 R 16, 235/85 R 16, 215/85 R 16, 7.50 R 16, 7.50 R 15, 10.00 R 15 LT
12	32 x 13	225/70 R 19.5, 225/75 R 17.5, 215/75 R 17.5, 205/75 R 17.5, 7.00 R 16, 7.00 R 15
13	23 x 07	6.50-10
14	22 x 09	6.00-9
15	19 x 07	4.50-10, 5.00-8
16	17 x 06	4.00-8

Note: All suggested envelope selections are to be used as a guide only.

DOUBLE ENVELOPE SYSTEM



Outer Envelope

Sl. No.	Product Code	Tyre Size (Suggested)
1	52 x 28*	14.00 R 24
2	46 x 22*	445/65 R 22.5, 425/65 R 22.5, 14.00 R 20
3	44 x 22*	325/95 R 24, 12.00 R 24, 11.00 R 24, 12.00 R 22
4	44 x 25*	12 R 24.5, 13 R 22.5, 14/80 R 20, 12.00 R 20
5	44 x 19*	445/65 R 19.5
6	43 x 25*	385/65 R 22.5, 365/80 R 20
7	42 x 22*	11 R 24.5, 315/80 R 22.5, 315/75 R 22.5, 315/70 R 22.5, 12 R 22.5, 11.00 R 22, 11.00 R 20
8	42 x 25*	295/80 R 22.5, 11 R 22.5, 10.00 R 22
9	40 x 18*	305/75 R 22.5, 305/70 R 22.5, 295/75 R 22.5, 10.00 R 20
10	40 x 21*	275/80 R 22.5, 275/70 R 22.5, 10 R 22.5
11	40 x 25*	9.00 R 20
12	38 x 22	10.00 R 15, TR/LB
13	38 x 25	265/70 R 22.5, 8.25 R 20
14	38 x 20	445/45 R 19.5, 305/70 R 19.5
15	35 x 20*	7.50 R 20, 7.00 R 20, 6.50 R 20, 265/70 R 19.5
16	35 x 16*	285/70 R 19.5, 9.00 R 16
17	32 x 16*	245/70 R 19.5, 9.5 R 17.5, 10 R 16.5, 265/75 R 16, 8.25 R 16
18	32 x 19*	245/65 R 19.5, 235/70 R 19.5, 225/70 R 19.5, 245/75 R 16, 235/85 R 16, 215/85 R 16, 10.00 R 15 LT, 8.25 R 15
19	31 x 18	245/70 R 17.5, 235/75 R 17.5, 225/75 R 17.5, 215/75 R 17.5, 205/75 R 17.5, 7.50 R 16, 7.00 R 16, 7.50 R 15
20	28 x 16	225/75 R 16, 215/75 R 16, 6.50 R 16, 6.00 R 16, 7.00 R 15

Note: All suggested envelope selections are to be used as a guide only. Variations in tyre sizes, tyre dimensions, precured tread designs and precured tread thickness may require a smaller or larger envelope size. In some instances it may be necessary to measure the built tyre to determine the correct envelope size.

GREEN envelope can be ordered for higher life. All our envelopes marked with * are also available in **GREEN**.

DOUBLE ENVELOPE SYSTEM




Inner Envelope

Sl. No.	Product Code	Tyre Size (Suggested)
1	1100 x 480	385/65 R 22.5, 385/55 R 22.5, 315/80 R 22.5, 315/75 R 22.5, 13 R 22.5, 12 R 22.5, 11.00 R 22, 12.00 R 20, 11.00 R 20, 425/55 R 19.5
2	1060 x 480 M	315/70 R 22.5, 305/70 R 22.5, 295/80 R 22.5, 295/75 R 22.5, 11 R 22.5, 10.00 R 22, 10.00 R 20
3	1060 x 480 U	275/80 R 22.5, 275/70 R 22.5, 10 R 22.5, 275/80 R 20, 9.00 R 20
4	780 x 400	9 R 17.5, 8.5 R 17.5, 8 R 17.5, 235/75 R 17.5, 225/75 R 17.5, 215/75 R 17.5, 205/75 R 17.5, 265/70 R 17.5, 245/70 R 17.5, 205/65 R 17.5, 8.25 R 16, 7.50 R 16, 7.00 R 16, 235/85 R 16, 215/85 R 16, 225/75 R 16, 215/75 R 16, 245/70 R 16, 255/75 R 15, 7.50 R 15

WICKING PAD

For Double Envelope System

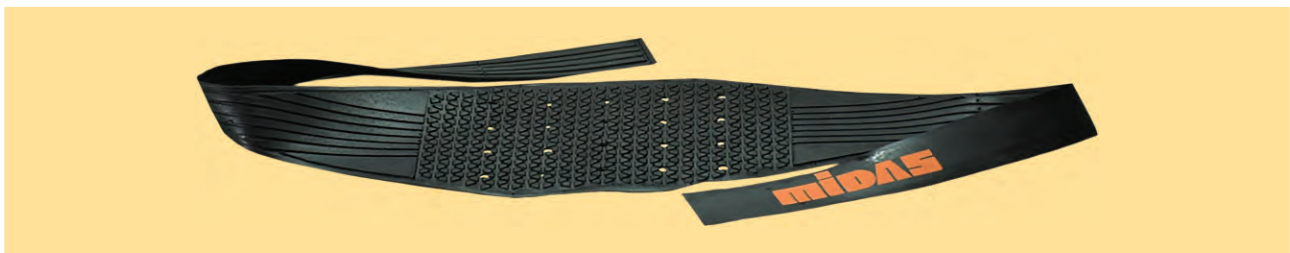

Sl. No.	Product Code	Tyre Size (Suggested)
1	1250 x 175	385/65 R 22.5, 385/55 R 22.5, 315/80 R 22.5, 315/75 R 22.5, 315/70 R 22.5, 305/70 R 22.5, 295/80 R 22.5, 295/75 R 22.5, 275/80 R 22.5, 275/70 R 22.5, 13 R 22.5, 12 R 22.5, 11 R 22.5, 10 R 22.5, 11.00 R 22, 10.00 R 22, 12.00 R 20, 11.00 R 20, 10.00 R 20, 9.00 R 20, 275/80 R 20, 425/55 R 19.5

RIM AND TUBE (Seals with removable flanges)



Sl. No.	Product Code	Tyre Size (Suggested)
1	52 x 21	14.00 R 24
2	46 x 22*	325/95 R 24, 12.00 R 24
3	46 x 15	445/65 R 22.5
4	46 x 19	14.00 R 20
5	44 x 22*	12 R 24.5, 11 R 24.5, 315/80 R 22.5, 11.00 R 22
6	44 x 19*	11.00 R 24, 13 R 22.5, 12.00 R 22, 14/80 R 20, 12.00 R 20
7	44 x 16	425/65 R 22.5, 445/65 R 19.5
8	43 x 20*	385/65 R 22.5, 365/80 R 20
9	42 x 19*	315/75 R 22.5, 12 R 22.5, 10.00 R 22, 10.00 R 20
10	42 x 22*	315/70 R 22.5, 305/75 R 22.5, 305/70 R 22.5, 295/80 R 22.5, 11 R 22.5
11	42 x 17*	11.00 R 20
12	40 x 18*	295/75 R 22.5, 275/80 R 22.5, 10 R 22.5, 9.00 R 20
13	40 x 13	445/45 R 19.5
14	38 x 20	275/70 R 22.5, 265/70 R 22.5, 8.25 R 20, 305/70 R 19.5, 10.00 R 15 TR/LB
15	35 x 16*	7.50 R 20, 7.00 R 20, 6.50 R 20, 285/70 R 19.5, 265/70 R 19.5, 245/70 R 19.5, 8.25 R 16
16	35 x 13*	9.00 R 16
17	32 x 16*	245/65 R 19.5, 235/70 R 19.5, 225/70 R 19.5, 245/70 R 17.5, 235/75 R 17.5, 225/75 R 17.5, 215/75 R 17.5, 245/75 R 16, 235/85 R 16, 7.50 R 16
18	32 x 15*	265/75 R 16, 8.25 R 15, 9.5 R 17.5, 10 R 16.5
19	32 x 19*	215/85 R 16, 10.00 R 15 LT
20	31 x 18	205/75 R 17.5
21	31 x 14*	7.00 R 16, 7.50 R 15, 7.00 R 15
22	28 x 16	225/75 R 16, 215/75 R 16, 6.50 R 16, 6.00 R 16, 195 R 15, 185 R 14, 195/75 R 14
23	23 x 10*	6.50-10
24	22 x 09*	155 R 12, 145 R 12, 6.00-9
25	19 x 09*	4.50-10
26	17 x 06*	5.00-8
27	17 x 08*	4.00-8

Note: All suggested envelope selections are to be used as a guide only.

GREEN envelope can be ordered for higher life. All our envelopes marked with * are also available in **GREEN**.

HALF SKIRT (No valve) Seals sidewall to sidewall



Sl. No.	Product Code	Tyre Size (Suggested)
1	52 x 28	14.00 R 24
2	46 x 28*	325/95 R 24, 12.00 R 24
3	46 x 22*	445/65 R 22.5, 425/65 R 22.5, 14.00 R 20
4	44 x 25*	12 R 24.5, 11 R 24.5, 11.00 R 24, 13 R 22.5, 11.00 R 22, 12.00 R 20
5	44 x 22*	12.00 R 22, 14/80 R 20
6	44 x 19*	445/65 R 19.5
7	43 x 25*	385/65 R 22.5, 365/80 R 20
8	42 x 22*	315/80 R 22.5, 315/75 R 22.5, 315/70 R 22.5, 12 R 22.5, 11.00 R 20
9	42 x 25*	305/75 R 22.5, 305/70 R 22.5, 295/80 R 22.5, 11 R 22.5, 10.00 R 22, 10.00 R 20
10	40 x 18*	295/75 R 22.5
11	40 x 21*	275/70 R 22.5, 10 R 22.5
12	40 x 25*	275/80 R 22.5, 9.00 R 20
13	38 x 22	10.00 R 15 TR/LB
14	38 x 25	265/70 R 22.5, 8.25 R 20
15	38 x 20	445/45 R 19.5, 305/70 R 19.5
16	35 x 20*	7.50 R 20, 7.00 R 20, 6.50 R 20, 265/70 R 19.5
17	35 x 16*	285/70 R 19.5, 9.00 R 16
18	32 x 16*	245/70 R 19.5, 9.5 R 17.5, 10 R 16.5, 265/75 R 16
19	32 x 19*	245/65 R 19.5, 235/70 R 19.5, 225/70 R 19.5, 245/70 R 17.5, 245/75 R 16, 235/85 R 16, 215/85 R 16, 8.25 R 16, 10.00 R 15 LT , 8.25 R 15
20	31 x 18	235/75 R 17.5, 225/75 R 17.5, 215/75 R 17.5, 205/75 R 17.5, 7.50 R 16, 7.00 R 16, 7.50 R 15
21	29 x 19	6.50 R 16, 6.00 R 16, 195 R 15
22	28 x 16	225/75 R 16, 215/75 R 16, 7.00 R 15
23	26 x 16	185 R 14, 195/75 R 14
24	21 x 12	155 R 12, 145 R 12, 6.00-9
25	23 x 13*	6.50-10
26	19 x 11*	4.50-10
27	17 x 08*	5.00-8, 4.00-8

Note: All suggested envelope selections are to be used as a guide only.

GREEN envelope can be ordered for higher life. All our envelopes marked with * are also available in **GREEN**.

CURING BAGS AND FLAPS




Sl. No.	Sizes	Sl. No.	Sizes	Sl. No.	Sizes
1	16.9 x 28	9	315/80 R 22.5	17	7.50 x 16
2	14.9 x 28	10	295/80 R 22.5	18	7.00 x 15
3	13.6 x 28	11	12.00 x 20	19	6.00 x 16
4	12.4 x 28	12	11.00 x 20	20	6.00 x 14
5	14.00 x 24/25	13	10.00 x 20	21	5.90 x 15
6	12.00 x 24	14	9.00 x 20	22	5.65/4.50 x 12
7	12 R 22.5	15	8.25 x 20	23	4.50 x 10
8	11 R 22.5	16	8.25 x 16	24	4.00 x 8



Sl. No.	Flap size (Inches)	Tyre Size (Suggested)
1	22.5 Extra Wide	385/65 R 22.5, 315/80 R 22.5, 12 R 22.5
2	22.5	295/80 R 22.5, 11 R 22.5
3	20 Extra Wide	12.00 R 20, 11.00 R 20, 10.00 R 20, 12.00 x 20, 11.00 x 20
4	20 SUPER	10.00 x 20, 9.00 x 20, 9.00 R 20, 8.25 x 20, 8.25 R 20
5	16 LCV	8.25 R 16, 7.50 R 16, 7.00 R 16, 7.50 R 15, 7.00 R 15

OTR TYRES 'O' SEALING RINGS

Sealing the tubeless tyre beads of OTR vehicle with split rims

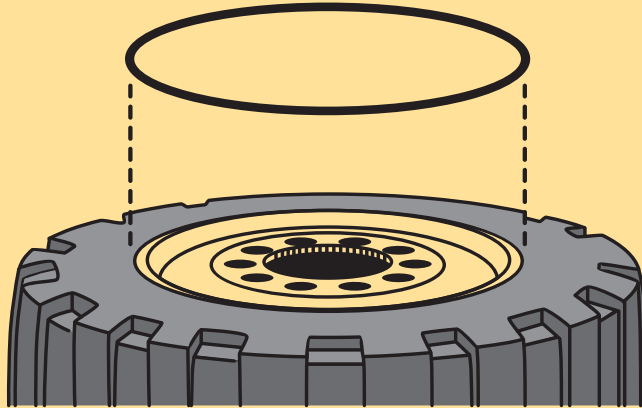

DATA OF MIDAS TUBELESS 'O' RING SIZES

SL	Product Code	Thickness (mm)	Rim Size (Inches)	Tyre Size (Suggested)
1	OR 20 THIN	6.5	20	365/80-20, 385/80-20 16.00-20, 14.00-20, 20-20
2	OR 24 THIN	6.5	24	16.00-24, 14.00-24
3	OR 25 THIN	6.5	25	15.5-25, 17.5-25
4	OR 25 THICK	9.5	25	14.00-25, 16.00-25 18.00-25, 20.5-25 23.5-25, 26.5-25, 29.5-25
5	OR 29 THICK	9.5	29	26.5-29, 29.5-29 33.25-29
6	OR 33 THICK	9.5	33	18.00-33, 35/65-33 33.25-33
7	OR 35 THICK	9.5	35	21.00-35, 24.00-35 33.25-35
8	OR 45 THICK	9.5	45	45/65-45
9	OR 49 THICK	9.5	49	27.00-49

MIDAS TREADS INDIA PVT. LTD.

Midas Marketing Building
Varissery Junction, Mariathuruthu P.O.
Kottayam - 686 017, Kerala, India.
Phone: 91-481-2561215
E-mail: ramnath.r@midastreads.com (Export Division)
sales@midastreads.com (Domestic Division)
Website: www.midas.co.in

